



Water base and solvent
base paints, varnishes,
enamels


Inks colorants and
pigment pastes

Agrochemical active
ingredients


HIGH SPEED DISSOLVER

MAIN FEATURES

- Working with movable vessel
- IP55 or Explosion proof execution
- Cowles or special impeller
- Continuously variable speed by frequency converter
- Equipped with a light cover to contain dust and splashes or with a cover suitable for vacuum execution
- Scraper on walls for high viscous products
- Touchscreen display and PLC for setting of operational parameter
- Data control and backup, remote assistance

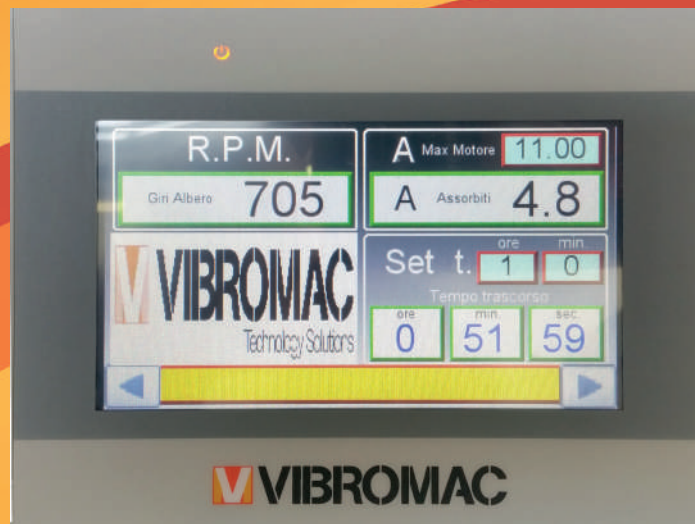

ANTI DUST COVER

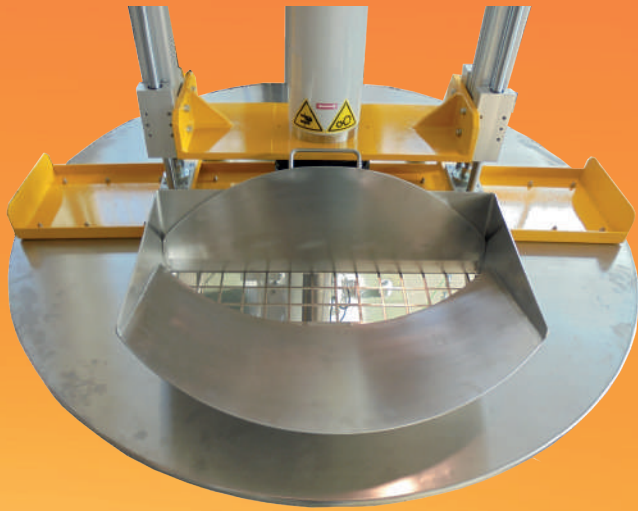


VACUUM EXECUTION COVER



TECHNICAL SPECIFICATIONS

	C15 C20	C25 C30	C40 C50	C60 C75	C100	C125 C150
WEIGHT (KG)	1100	1400	1500	1700	1900	2700
A (mm) *	2080	2150	2380	2750		
B (mm) *	2280	2350	2580	2950		
C (mm) *	1100	1100	1100	1100		
D (mm)	1300	1300	1300	1300		
E (mm)	3180	3450	3680	3850		
F (mm)	3580	3650	3880	4250		
G (mm)	1800	1830	2170	3070		
	440	520	620	780		
	1540	1540	1540	-		
	750	790	870	1320		

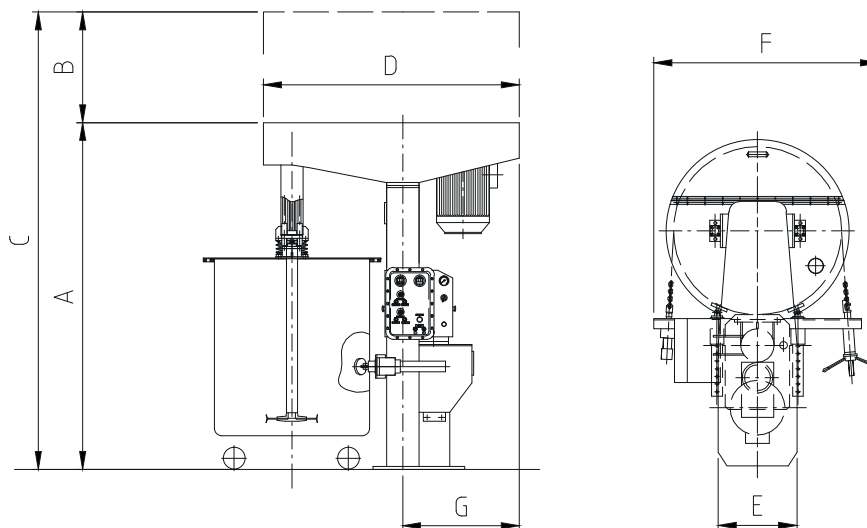

VIBRO-MAC S.r.l.

Via Primo Maggio, 2/4
 20070 San Zenone al Lambro (MI) - ITALY
 Tel. +39.02.98264390
 Fax. +39.02.98264392
info@vibromac.it
www.vibromac.it